



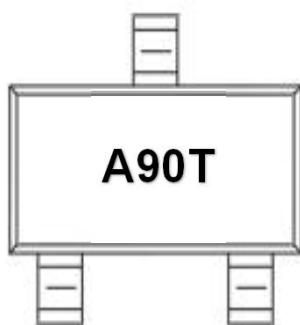
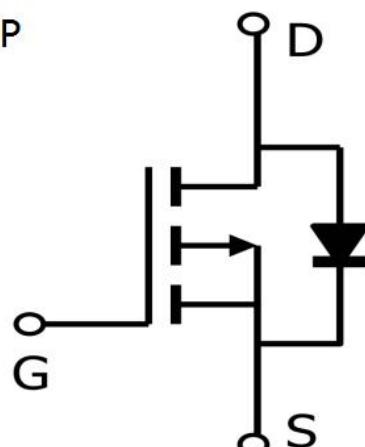
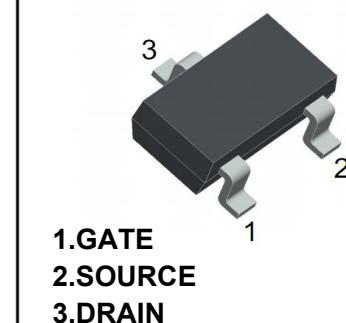
SHENZHEN MENGKE ELECTRONICS TECHNOLOGY CO.,LTD

SOT-23 Plastic-Encapsulate MOSFETS**MK3409****P-Channel 30-V(D-S) MOSFET**

V(BR)DSS	RDS(on)MAX	ID
-30 V	120mΩ@-10V 170mΩ@-4.5V	-2.6A

**FEATURE**

※ TrenchFET Power MOSFET

**APPLICATION**※ Load Switch for Portable Devices  
※ DC/DC Converter**MARKING****Equivalent Circuit****SOT- 23****Maximum ratings ( Ta=25°C unless otherwise noted)**

Parameter	Symbol	Value	Unit
Drain-Source Voltage	VDS	-30	V
Gate-Source Voltage	VGS	±20	
Continuous Drain Current	ID	-2.6	A
Pulsed Diode Current	IDM	-20	
Continuous Source-Drain Current(Diode Conduction)	IS	-2	
Power Dissipation	PD	1.4	W
Thermal Resistance from Junction to Ambient (t≤5s)	R <sub>θJA</sub>	125	°C/W
Operating Junction	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>STG</sub>	-55~+150	°C



## MOSFET ELECTRICAL CHARACTERISTICS

## Static Electrical Characteristics (Ta = 25 °C Unless Otherwise Noted)

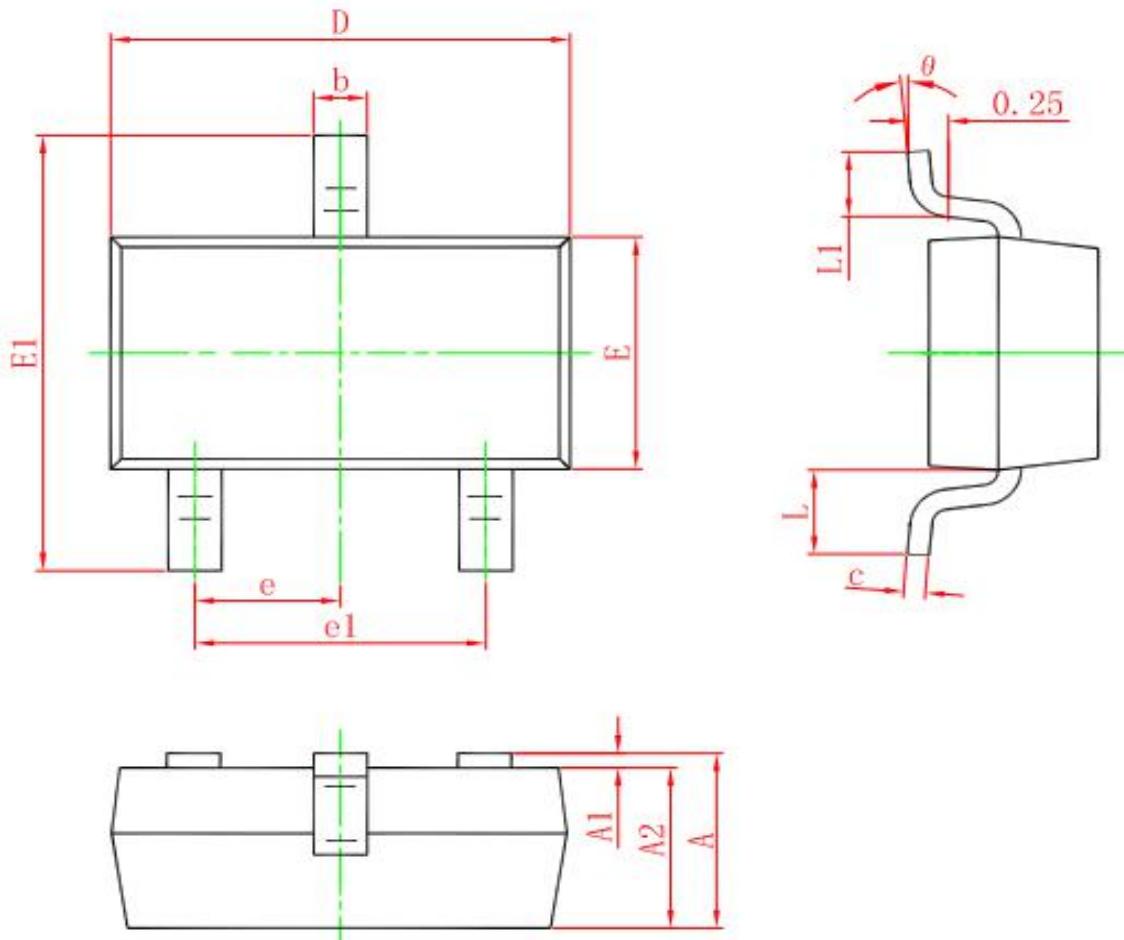
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static</b>						
Drain-source breakdown voltage	V(BR)DSS	VGS = 0V, ID = -250µA	-30			V
Gate-source threshold voltage	VGS(th)	VDS = VGS, ID = -250µA	-1		-2.5	V
Gate-source leakage	IGSS	VDS = 0V, VGS = ±20V			±100	nA
Zero gate voltage drain current	IDSS	VDS = -30V, VGS = 0V			-1	µA
Drain-source on-state resistancea	RDS(on)	VGS = -10V, ID = -2.6A		78	120	mΩ
		VGS = -4.5V, ID = -2A		112	170	mΩ
Forward transconductancea	gfs	VDS = -4.5V, ID = -2.6A	5.5			S
Diode forward voltage	VSD	IS= -1A, VGS=0V		-0.8	-1.3	V
<b>Dynamic</b>						
Input capacitance	Ciss	VDS = -15V, VGS = 0V, f=1MHz		302		pF
Output capacitance	Coss			51		pF
Reverse transfer capacitanceb	Crss			38		pF
Total gate charge	Qg	VDS = -15V, VGS = -10V, ID = -2.6A		6.8		nC
Gate-source charge	Qgs			1.6		nC
Gate-drain charge	Qgd			1		nC
Gate resistance	Rg	f=1MHz		12	18	Ω
<b>Switchingb</b>						
Turn-on delay time	td(on)	VDS = -15V RL = 6Ω, ID ≈ -1A, VGEN = -10V, Rg = 3Ω		7.5		ns
Rise time	tr			3.2		ns
Turn-off delay time	td(off)			17		ns
Fall time	tf			6.8		ns
<b>Drain-source body diode characteristics</b>						
Continuous Source-Drain Diode Current	IS	Tc=25°C			-2	A
Pulsed Diode forward Current	ISM				-20	A

**Note :**

- Repetitive Rating : Pulse width limited by maximum junction temperature.
- Surface Mounted on FR4 Board, t < 5 sec.
- Pulse Test : Pulse Width ≤ 300µs, Duty Cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.



## SOT-23 PACKAGE OUTLINE DIMENSIONS



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°



## Typical Characteristics:

